

| LVDT SENSORS

Description

Kavlico LVDTs operate using a non-contacting induction principle, providing friction free motion and nearly infinite resolution. These sensors have been refined and improved for over 50 years, making Kavlico LVDTs the standard for flight and engine control position measurements. Kavlico is the largest manufacturer of matched multiple channel sensors for redundancy.


Multiple channels are provided in a variety of housing designs that can be directly mounted on the airframe control surfaces and cockpit controls, or provided as an integral part of a servo valve or main ram actuator. Over 1 million Kavlico LVDTs are installed in aircraft worldwide.

Features

- Single & multiple channel designs (tandem or parallel arrangement)
- Linear displacement from .001" to 60"
- Stainless steel construction or lightweight aluminum
- Operating pressures up to 10,000 psi (15,000 psi burst pressure) DO-160)
- High temperature & vibration environments (per MILSTD 810 or RTCA
- High accuracy ($\pm 0.25\%$ full scale)
- Infinite resolution
- Hermetic designs available
- Linearity ($\pm 0.1\%$ full scale)
- Fault detection
- High reliability (single channel MTBF of 1,000,000hrs. typical)

Applications

- Flight control actuators
- Valves
- Nose wheel steering systems
- Cockpit controls
- Engine bleed air systems
- Fuel controls
- Fly-by-wire systems
- Brake-by-wire systems
- Environmental control systems
- Thrust reverser
- Engine control actuators
- Engine fuel control

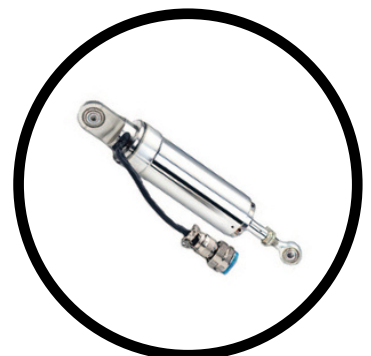



GLOSSARY OF TERMS

Sensitivity - The slope of a best-fit straight line drawn through the output data. An LVDT is a ratiometric device and the sensitivity should be expressed as the ratio of the volts out (V_1-V_2), per volt in (V_E or V_1+V_2), per degree of rotation (V/V / degree).

Accuracy - The maximum allowed deviation from the nominal output, when the output is taken per the above sensitivity definition. Typically specified as a $\pm$ percent of full scale.

Linearity - The maximum deviation of any calibration point from a specified straight line. The error is usually expressed as a percentage of Full Scale output. The most commonly used line is the "Best Fit Straight Line" (BFSL).

Tracking - The uniformity of performance between channels of multiple channel LVDTs. Each channel's output is compared and the maximum difference between multiple channels is termed "tracking". Tracking is normally expressed as a percentage of Full Scale.

Crosstalk - The term used for multiple channel units to describe the voltage produced in the secondary of one channel by the primary excitation of another channel.

FullScale - The algebraic difference between the nominal outputs at the ends of the electrical stroke. (Ref. Instrument Society of America, ISA - S37.1- 1975)

Temperature Coefficient - The % change in the LVDT sensitivity over a temperature range. Usually defined as a percentage per 100°F max. Example: 0.25% /100°F.




DIMENSIONS


Dimensions in mm [Inch]

0.25%/100°F.


Typical Output (Calibrated Range)

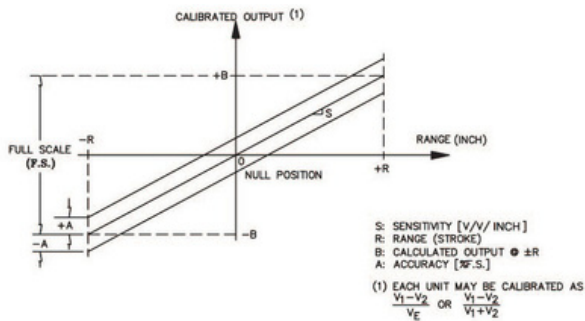

Electrical Schematic

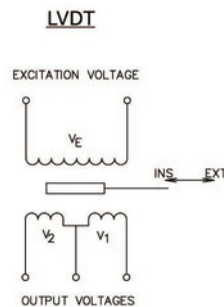

Nominal Individual Output

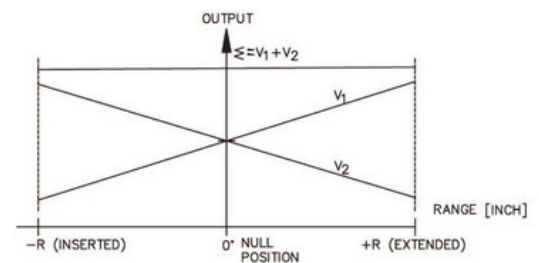

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice. Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF. All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.